




TEMPERATURE CONTROL FOR **TODAY & TOMORROW**

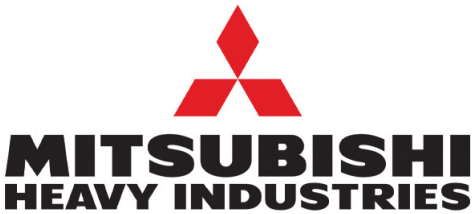

FDC1000KXZE2

100.0 KW



Specificații tehnice

Combinatii posibile (FDC)				500KXZE2 + 500KXZE2
Capacitate nominala (cai putere)				36HP
Sursă de alimentare				Trifazic 380-415V, 50Hz
Putere de pornire			A	16
Curent maxim admis			A	80.4
Capacitate nominala	Racire		kW	100.0
	Incalzire			112.0
Consumul de energie			Racire	28.02
			Incalzire	27.12
Dimensiuni exterioare	I/L/A		mm	2052x2700x720
Greutate netă			kg	756
Refrigerant	Tip / GWP			R410A / 2088
Refrigerant	Incarcare		kg/TCO2Eq	11.5x2
Dimensiuni țeavă refrigerant	Refrigerant lichid		mm(in)	ø15.88(5/8")
Dimensiuni țeavă refrigerant	Refrigerant gazos		mm(in)	ø38.1(1 1/2") [ø34.92(1 3/8")]
Capacitatea minima/maxima acceptata			%	50~130
Numarul maxim de unitati interne acceptate				80



All measurements in mm.

