



TEMPERATURE CONTROL FOR TODAY & TOMORROW



FDC560KXZRXE2

56.0 KW




Specificații tehnice

Combinatii posibile (FDC)					280KXZRE2 + 280KXZRE2	
Capacitate nominala (cai putere)					20HP	
Sursă de alimentare					Trifazic 380-415V, 50Hz	
Putere de pornire				A	10	
Curent maxim admis				A	40.0	
Capacitate nominala	Racire			kW	56.0	
	Incalzire				56.0	
Consumul de energie			Racire	kW	14.78	
			Incalzire		13.72	
Dimensiuni exterioare		I/L/A		mm	1697x2700x720	
Greutate netă				kg	610	
Refrigerant		Tip / GWP			R410A	
Incarcare refrigerant		R410A			kg	11.5x2
Dimensiuni țeavă refrigerant		Refrigerant lichid			mm(in)	ø12.7(1/2")
Dimensiuni țeavă refrigerant		Admisie refrigerant gazos			mm(in)	ø28.58(1 1/8")
Dimensiuni țeavă refrigerant		Refulare refrigerant gazos			mm(in)	ø22.22(7/8")
Capacitatea minima/maxima acceptata				%	80-160	
Numarul maxim de unitati interne acceptate					59	



TEMPERATURE CONTROL FOR TODAY & TOMORROW

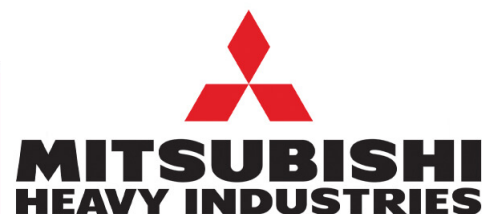

Schema tehnică

Dimensions

All measurements in mm.

