



TEMPERATURE CONTROL FOR TODAY & TOMORROW



FDC850KXZE2

85.0 KW




Specificații tehnice

Combinatii posibile (FDC)				400KXZE2 + 450KXZE2
Capacitate nominala (cai putere)				30HP
Sursă de alimentare				Trifazic 380-415V, 50Hz
Putere de pornire			A	10
Curent maxim admis			A	64.0
Capacitate nominala	Racire		kW	85.0
	Incalzire			95.0
Consumul de energie		Racire	kW	24.96
		Incalzire		22.73
Dimensiuni exterioare	I/L/A		mm	2052x2700x720
Greutate netă			kg	664
Refrigerant	Tip / GWP			R410A / 2088
Refrigerant	Incarcare		kg/TCO2Eq	11.5x2
Dimensiuni țeavă refrigerant	Refrigerant lichid		mm(in)	ø15.88(5/8")
Dimensiuni țeavă refrigerant	Refrigerant gazos		mm(in)	ø31.75(1 1/4") [ø34.92(1 3/8")]
Capacitatea minima/maxima acceptata			%	50~160
Numarul maxim de unitati interne acceptate				80



TEMPERATURE CONTROL FOR TODAY & TOMORROW

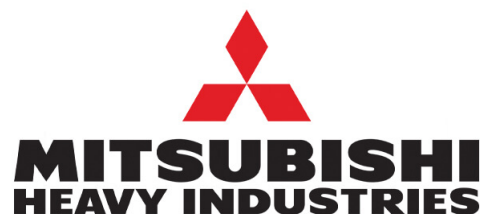

Schema tehnică

Dimensions

All measurements in mm.

