



TEMPERATURE CONTROL FOR TODAY & TOMORROW



FDC900KXZXE2

89.5 KW




Specificații tehnice

Combinatii posibile (FDC)				280KXZE2 + 280KXZE2 + 335KXZE2
Capacitate nominala (cai putere)				32HP
Sursă de alimentare				Trifazic 380-415V, 50Hz
Putere de pornire			A	15
Curent maxim admis			A	60.3
Capacitate nominala	Racire		kW	89.5
	Incalzire			100.5
Consumul de energie		Racire	kW	23.49
		Incalzire		23.85
Dimensiuni exterioare	I/L/A		mm	1697x4050x720
Greutate netă			kg	864
Refrigerant	Tip / GWP			R410A
Incarcare refrigerant	R410A		kg	11.0x3
Dimensiuni țeavă refrigerant	Refrigerant lichid		mm(in)	ø15.88(5/8")
Dimensiuni țeavă refrigerant	Refrigerant gazos		mm(in)	ø31.75(1 1/4") [ø34.92(1 3/8")]
Capacitatea minima/maxima acceptata			%	80-160
Numarul maxim de unitati interne acceptate				80



TEMPERATURE CONTROL FOR TODAY & TOMORROW

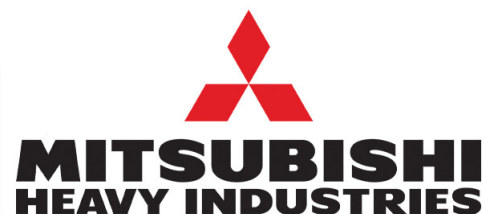

Schema tehnică

Dimensions

All measurements in mm.

