





TEMPERATURE CONTROL FOR TODAY & TOMORROW

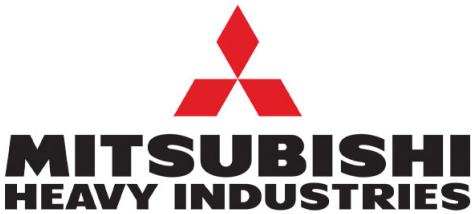

FDT60ZSXW1VH
5.6 KW



Unitate internă : FDT60VH



Unitate externă : SRC60ZSX-W1

Specificații tehnice

R32

Unitate internă			FDT60VH	
Unitate externă			SRC60ZSX-W1	
Sursă de alimentare			Monofazic 220-240V, 50Hz / 220V, 60Hz	
Capacitate nominală de răcire (Min~Max)		kW	5.6 (1.1 ~ 6.3)	
Capacitate nominala de incalzire (Min~Max)		kW	6.7 (0.6 ~ 6.7)	
Consumul de energie	Racire/Incalzire	kW	1.33 / 1.56	
EER/COP	Racire/Incalzire		4.21 / 4.29	
Curent de intrare		A	5	
Amperaj maxim		A	15	
Nivel putere sonoră*1	U.I.	Racire/Incalzire	dB(A)	58 / 59
	U.E.	Racire/Incalzire		65 / 65
Nivel presiune sonoră*1	U.I.	Racire (Hi/Me/Lo/Ulo)	dB(A)	44 / 34 / 30 / 27
		Incalzire (Hi/Me/Lo/Ulo)		44 / 34 / 30 / 23
	U.E.	Racire/Incalzire		53 / 54
Flux de aer	U.I.	Racire (Hi/Me/Lo/Ulo)	m ³ /min	26 / 17 / 14 / 11
		Incalzire (Hi/Me/Lo/Ulo)		26 / 17 / 14 / 11
	U.E.	Racire/Incalzire		41.5 / 39
Dimensiuni exterioare	U.I.	Inaltime x Latime x Adancime	mm	Unitate: 236 x 840 x 840 Panou: 35 x 950 x 950
	U.E.			640 x 800(+71) x 290
Greutate netă	U.I. / U.E.		kg	26 (Unitate:21 Panou standard:5) / 45
Refrigerant		Tip/GWP		R32/675
Refrigerant		Incarcare	kg/TCO2Eq	1.30/0.878
Dimensiuni țevă refrigerant		Lichid/Gaz	ø mm	6.35(1/4") / 12.7(1/2")
Lungime teava refrigerant (o directie)			m	Max.30
Diferenta de nivel suportata		Unitate externă este mai sus/mai jos		m
Interval de functionare - temperatura exterioara		Racire*2		-15~46
		Incalzire		-20~20
Panou			T-PSA-5BW-E, T-PSAE-5BW-E (Alb) / T-PSA-5BB-E, T-PSAE-5BB-E (Negru)	
Filtru de aer			Filtru lavabil x 1(Lavabil)	
Telecomanda (opțional)			Cu fir: RC-EX3A, RC-E5, RCH-E3 Fara fir: RCN-T-5BW-E2, RCN-T-5BB-E2	
Clasa energetica (Racire/Incalzire)			A+++ / A++	
SEER			8.74	
SCOP (Climat temperat)			5.00	
Pdesign (racire/incalzire(@-10°C))		kW	5.6/5.2	
Consumul anual de electricitate (racire/incalzire)		kWh/a	225/1455	
Performanta in modul Incalzire			Medie	





**MITSUBISHI
HEAVY INDUSTRIES**

Indoor units: FDT40VH, 50VH, 60VH, 71VH





Models SRC40ZSX-W1, 50ZSX-W1, 60ZSX-W1

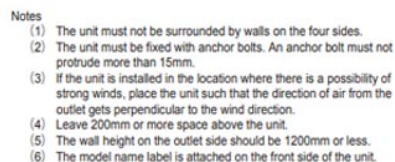

Minimum installation space

Symbol	Content
A	Service valve connection (Gas side) $\phi 12.7(1/2")(\text{Flare})$
B	Service valve connection (Liquid side) $\phi 6.35(1/4")(\text{Flare})$
C	Pipe/cable draw-out hole
D	Drain discharge hole
E	Anchor bolt hole $\phi 20 \times 5$ places M10-12 $\times$ 4 places

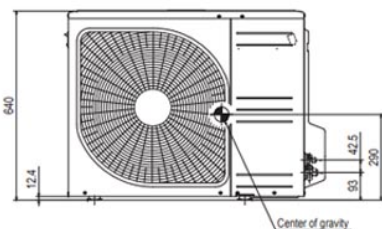

Size \ Examples installation	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open