



FDTW71KXE6F

7.1 KW




Specificații tehnice

Capacitate nominală de răcire		kW	7.1
Capacitate nominala de incalzire		kW	8.0
Sursă de alimentare			Monofazic 220-240V, 50Hz
Consumul de energie	Racire	kW	0.14-0.14
	Incalzire	kW	0.14-0.14
Nivel putere sonoră		dB(A)	58
Nivel de presiune sonoră racire		db(A)	P-Hi: 42 Hi:38 Me:34 Lo:31
Dimensiuni exterioare unitate	I x L x A	mm	Unitate:325x820x620 Panou:20x1120x680
Greutate netă		kg	Unitate:23 Panou:8.5
Flux de aer		m ³ /min	P-Hi: 14.5 Hi:12 Me:10 Lo:9
Aport de aer proaspat			Este posibil
Panou			TW-PSA-26W-E
Filtru de aer			Filtru lavabil x2 (Lavabil)
Telecomanda (opționalal)			Cu fir: RC-EX3A, RC-E5, RCH-E3 Fara fir: RCN-TW-E2
Dimensiuni țeavă refrigerant		mm(in)	Refrigerant lichid: ø9.52(3/8") Refrigerant gazos: ø15.88(5/8")
Refrigerant		Tip/GWP	R410A / 2088





TEMPERATURE CONTROL FOR **TODAY & TOMORROW**

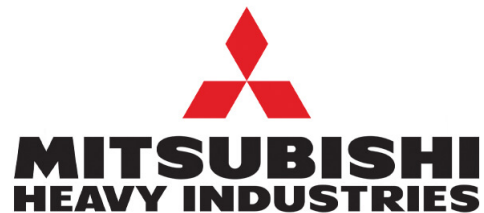

Schema tehnică

FDTW28KXE6F, 45KXE6F, 56KXE6F, 71KXE6F

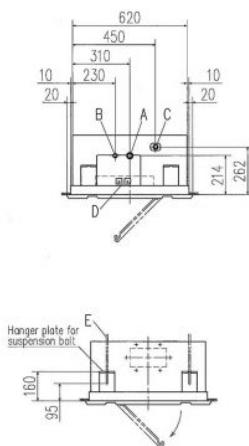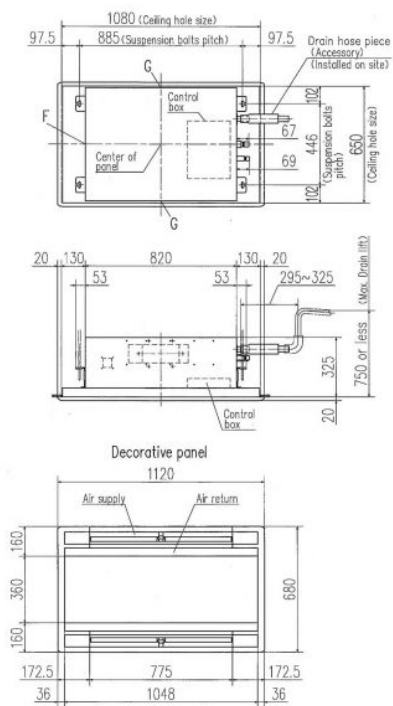

Symbol	Model	28	45,56	71
A	Gas piping	ø1.52 (1/8") (1mm)	ø1.78 (1/4") (1mm)	ø1.88 (5/8") (1mm)
B	Liquid piping	ø6.35 (1/4") (1mm)	ø6.35 (1/4") (1mm)	ø6.35 (1/4") (1mm)
C	Drain piping	VP2S (O.D. 32)		
D	Hole for wiring			
E	Suspension bolts		(M10)	
F	Outside air opening for ducting		(Knock out)	
G	Air outlet opening for ducting		(Knock out)	

Notes (1) The model name label is attached on the lid of the control box.

