



TEMPERATURE CONTROL FOR TODAY & TOMORROW



SRK35ZS-WFB

3.5 KW




Specificații tehnice

R32

Capacitate nominală de răcire		kW	3.5
Capacitate nominală de încălzire		kW	4.0
Nivel putere sonoră	Răcire	dB(A)	54
	Încălzire	dB(A)	56
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	40 / 30 / 26 / 19
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	41 / 36 / 25 / 19
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m ³ /min	11.3 / 8.7 / 7.0 / 5.0
	Încălzire(Hi/Me/Lo/Ulo)	m ³ /min	12.3 / 11.0 / 7.0 / 5.6
Dimensiuni exterioare (HĂWĂD)		mm	290Ă870Ă230
Greutate netă		kg	9.5
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm ĂĂĂ	6.35(1/4") / 9.52(3/8")
Filtre		Allergen Clear Filter Ă 1, Photocatalytic lavabil Deodorizing Filter Ă 1	






TEMPERATURE CONTROL FOR **TODAY & TOMORROW**

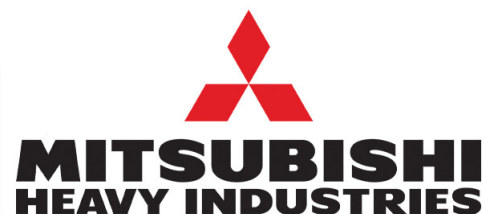

Schema tehnică

SRK20ZS-WF, -WFB, -WFT, -W
 SRK25ZS-WF, -WFB, -WFT, -W
 SRK35ZS-WF, -WFB, -WFT, -W
 SRK50ZS-WF, -WFB, -WFT, -W
 SRK20ZS-S, -SB, -ST SRK25ZS-S, -SB, -ST
 SRK35ZS-S, -SB, -ST SRK50ZS-S, -SB, -ST

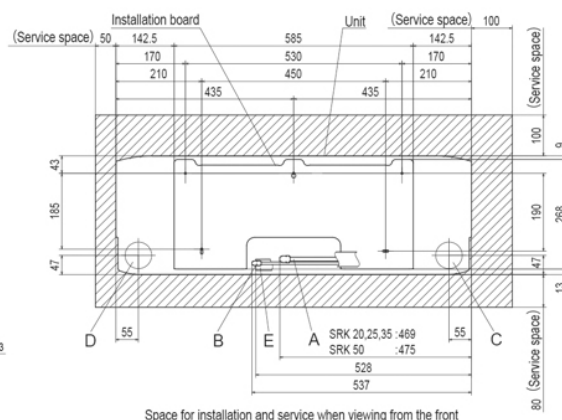

Symbol	Content
A	Gas piping SRK20, 25, 35 $\phi 9.52$ (3/8") (Flare) SRK50 $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Hole on wall for right rear piping ($\phi 65$)
D	Hole on wall for left rear piping ($\phi 65$)
E	Drain hose VP16
F	Outlet for piping (on both side)