




TEMPERATURE CONTROL
FOR **TODAY & TOMORROW**



SRK35ZSX-WFT
3.5 KW

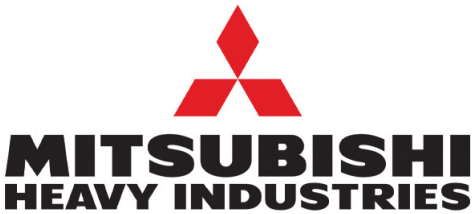


Specificații tehnice

R32

Capacitate nominală de răcire		kW	3.5
Capacitate nominală de încălzire		kW	4.3
Nivel putere sonoră	Răcire	dB(A)	58
	Încălzire	dB(A)	58
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	43 / 35 / 26 / 19
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	42 / 35 / 28 / 19
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m ³ /min	13.1 / 10.8 / 7.3 / 5.0
	Încălzire(Hi/Me/Lo/Ulo)	m ³ /min	13.9 / 11.8 / 8.6 / 5.4
Dimensiuni exterioare (HĂ×WĂ×D)		mm	305Ă×920Ă×220
Greutate netă		kg	13.0
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm Ă×Ă	6.35(1/4") / 9.52(3/8")
Filtre		Allergen Clear Filter Ă×1, Photocatalytic lavabil Deodorizing FilterĂ×1	





TEMPERATURE CONTROL FOR **TODAY & TOMORROW**

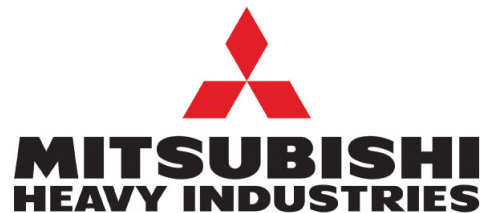

Schema tehnică

SRK20ZSX-WF, -WFB, -WFT, -W
SRK25ZSX-WF, -WFB, -WFT, -W
SRK35ZSX-WF, -WFB, -WFT, -W
SRK50ZSX-WF, -WFB, -WFT, -W
SRK60ZSX-WF, -WFB, -WFT, -W
SRK20ZSX-S SRK25ZSX-S SRK35ZSX-S
SRK50ZSX-S SRK60ZSX-S

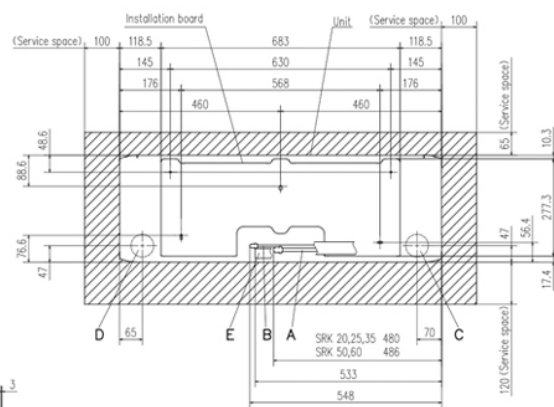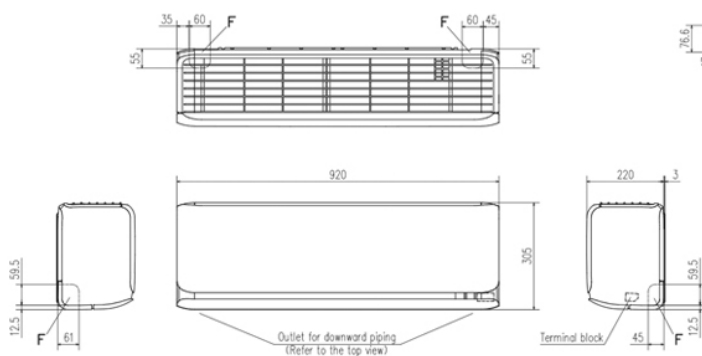

Symbol	Content
A	Gas piping SRK 20,25,35 #9.52 (3/8") (Flare) SRK 50,60 #12.7 (1/2") (Flare)
B	Liquid piping #6.35 (1/4") (Flare)
C	Hole on wall for right rear piping (#65)
D	Hole on wall for left rear piping (#65)
E	Drain hose VP16
F	Outlet for piping