




TEMPERATURE CONTROL FOR TODAY & TOMORROW



SRK50ZS-W
5.0 KW

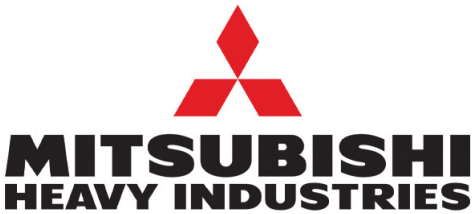


Specificații tehnice

R32


Capacitate nominală de răcire		kW	5.0
Capacitate nominală de încălzire		kW	5.8
Nivel putere sonoră	Răcire	dB(A)	59
	Încălzire	dB(A)	60
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	46 / 36 / 29 / 22
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	46 / 37 / 31 / 24
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m ³ /min	12.1 / 9.9 / 7.4 / 5.9
	Încălzire(Hi/Me/Lo/Ulo)	m ³ /min	13.9 / 11.2 / 9.1 / 7.4
Dimensiuni exterioare (HĂWĂD)		mm	290Ă870Ă230
Greutate netă		kg	10.0
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm ĂĂĂ	6.35(1/4") / 12.7(1/2")
Filtre		Allergen Clear Filter Ă 1, Photocatalytic lavabil Deodorizing Filter Ă 1	



TEMPERATURE CONTROL FOR **TODAY & TOMORROW**

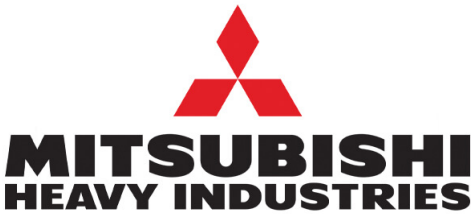

Schema tehnică

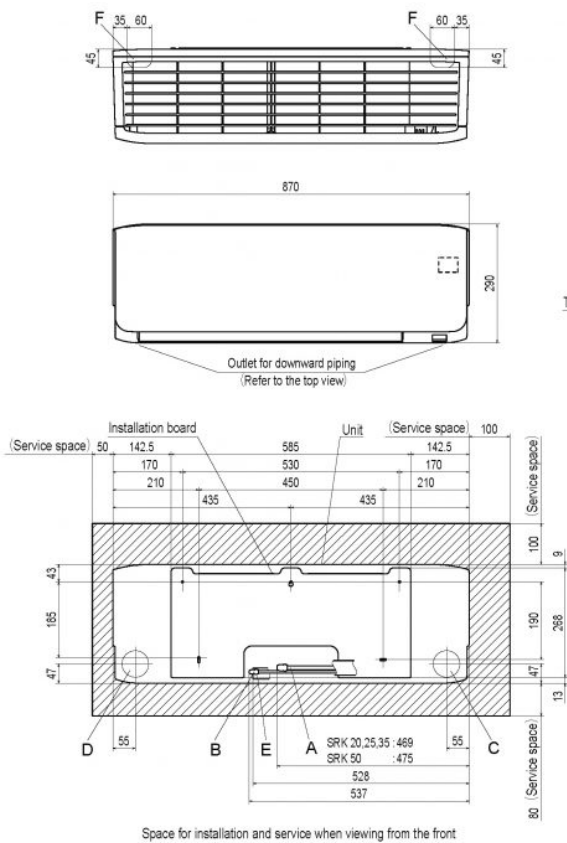

Symbol	Content
A	Gas piping SRK20, 25, 35 $\phi 9.52$ (3/8") (Flare) SRK50 $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Hole on wall for right rear piping ($\phi 55$)
D	Hole on wall for left rear piping ($\phi 55$)
E	Drain hose VP16
F	Outlet for piping (on both side)

- Notes (1) The model name label is attached on the right side of the unit.
(2) To connect the wired remote control, the interface kit (SC-BIKN-E) is required.

Unit:mm