




TEMPERATURE CONTROL FOR TODAY & TOMORROW

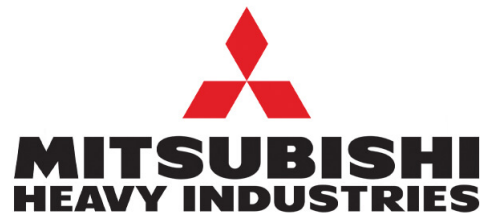

SRK50ZSX-WB / SRC50ZSX-W2

5.0 KW



Unitate internă :



Unitate externă : SRC50ZSX-W2


Specificații tehnice

R32

Unitate internă			SRK50ZSX-WB	
Unitate externă			SRC50ZSX-W2	
Sursă de alimentare			Monofazic, 220 - 240, 50Hz	
Capacitate nominală de răcire (Min~Max)		kW	5.0 (1.0~6.2)	
Capacitate nominala de incalzire (Min~Max)		kW	6.0 (0.8~8.2)	
Consumul de energie	Racire/Incalzire		kW	1.24 / 1.36
EER/COP	Racire/Incalzire			4.03 / 4.41
Amperaj maxim		A	15	
Nivel putere sonoră	U.I.	Racire/Incalzire	dB(A)	59 / 62
	U.E.	Racire/Incalzire		63 / 61
Nivel presiune sonoră	U.I.	Racire (Hi/Me/Lo/Ulo)		44 / 39 / 31 / 22
		Incalzire (Hi/Me/Lo/Ulo)		47 / 41 / 33 / 23
	U.E.	Racire/Incalzire		51 / 49
Flux de aer	U.I.	Racire (Hi/Me/Lo/Ulo)	m ³ /min	14.3 / 12.4 / 7.8 / 5.4
		Incalzire (Hi/Me/Lo/Ulo)		17.3 / 14.3 / 9.8 / 6.2
	U.E.	Racire/Incalzire		39.0 / 33.0
Dimensiuni exterioare	U.I.	Inaltime x Latime x Adancime	mm	305 x 920 x 220
	U.E.			640 x 800(+71) x 290
Greutate netă	U.I. / U.E.		kg	13.0 / 45.0
Refrigerant		Tip/GWP		R32 / 675
Refrigerant		Incarcare	kg/TCO2Eq	1.30 / 0.878
Dimensiuni țevă refrigerant		Lichid/Gaz	ø mm	6.35(1/4") / 12.7(1/2")
Lungime teava refrigerant (o directie)			m	Max.30
Diferenta de nivel suportata		Unitate externă este mai sus/mai jos		Max.20 / Max.20
Interval de functionare - temperatura exterioara	Racire		°C	-15~46
	Incalzire			-20~24
Filtre			Filtru Antialergeni x 1, Filtru lavabil fotocatalitic si dezodorizant x 1	
Clasa energetica (Racire/Incalzire)			A++/A++	
SEER			8.30	
SCOP (Climat temperat)			4.70	
Pdesign (racire/incalzire(@-10°C))		kW	5.00/4.50	
Consumul anual de electricitate (racire/incalzire)		kWh/a	211/1341	
Performanta in modul Incalzire			Medie	




TEMPERATURE CONTROL FOR TODAY & TOMORROW

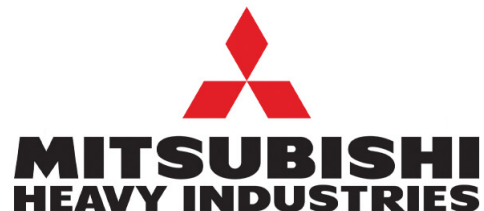




Schema tehnică

Outdoor units:
SRC50ZSX-W(-W1, -W2), 60ZSX-W(-W1)


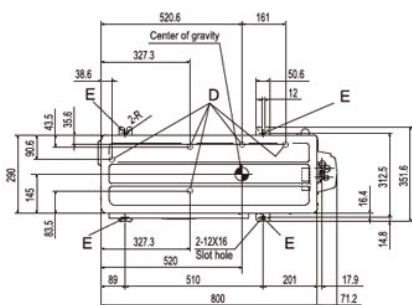


Symbol	Content
A	Service valve connection (Gas side) $\phi 12.7 (1/2")$ (Flare)
B	Service valve connection (Liquid side) $\phi 6.35 (1/4")$ (Flare)
C	Pipe/cable draw-out hole
D	Drain discharge hole $\phi 20 \times 5$ places
E	Anchor bolt hole M10-12x4 places

Examples installation	I	II	III	IV
Size				
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

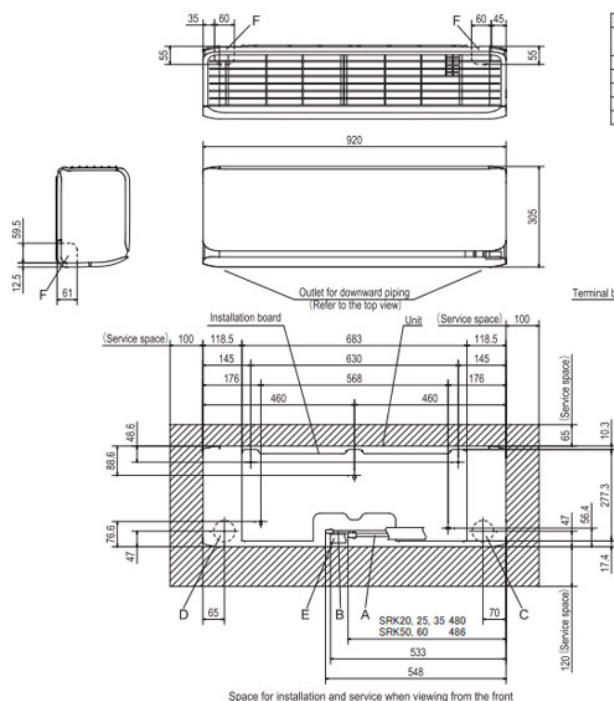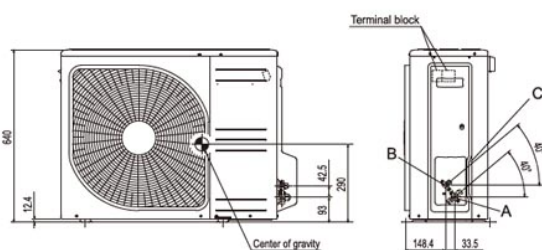

Symbol	Content
A	Gas piping SRK20, 25, 35 $\phi 9.52 (3/8")$ (Flare) SRK50, 60 $\phi 12.7 (1/2")$ (Flare)
B	Liquid piping $\phi 6.35 (1/4")$ (Flare)
C	Hole on wall for right rear piping ($\phi 65$)
D	Hole on wall for left rear piping ($\phi 65$)
E	Drain hose VP18
F	Outlet for piping

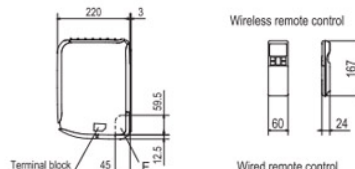

- Notes (1) The model name label is attached on the right side of the unit.
(2) To connect the wired remote control, the interface kit (SC-BIKN2-E) is require...

Unit: mm
Models SRK20ZSX-W, 25ZSX-W, 35ZSX-W, 50ZSX-W,
60ZSX-W, SRK20ZSX-WB, 25ZSX-WB, 35ZSX-WB,
50ZSX-WB, 60ZSX-WB, SRK20ZSX-WT, 25ZSX-WT,
35ZSX-WT, 50ZSX-WT, 60ZSX-WT