




TEMPERATURE CONTROL FOR TODAY & TOMORROW




SRK50ZSX-WF
5.0 KW

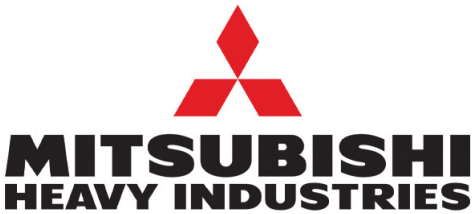

Specificații tehnice

R32

Capacitate nominală de răcire		kW	5.0
Capacitate nominală de încălzire		kW	6.0
Nivel putere sonoră	Răcire	dB(A)	59
	Încălzire	dB(A)	62
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	44 / 39 / 31 / 22
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	47 / 41 / 33 / 23
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m ³ /min	14.3 / 12.4 / 7.8 / 5.4
	Încălzire(Hi/Me/Lo/Ulo)	m ³ /min	17.3 / 14.3 / 9.8 / 6.2
Dimensiuni exterioare (HĂ×WĂ×D)		mm	305Ă×920Ă×220
Greutate netă		kg	13.0
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm Ă×Ă	6.35(1/4") / 12.7(1/2")
Filtre		Allergen Clear Filter Ă×1, Photocatalytic lavabil Deodorizing FilterĂ×1	

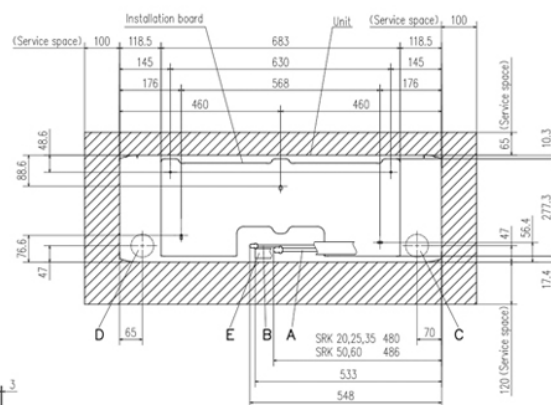[illegible]

Space for installation and service when viewing from the front

Symbol	Content
A	Gas piping SRK 20,25,35 Ø9.52 (3/8") (Flare) SRK 50,60 Ø12.7 (1/2") (Flare)
B	Liquid piping Ø6.35 (1/4") (Flare)
C	Hole on wall for right rear piping (ø65)
D	Hole on wall for left rear piping (ø65)
E	Drain hose VP16
C	Outlet for nitrogen