




TEMPERATURE CONTROL FOR TODAY & TOMORROW



SRK50ZSX-WFT
5.0 KW

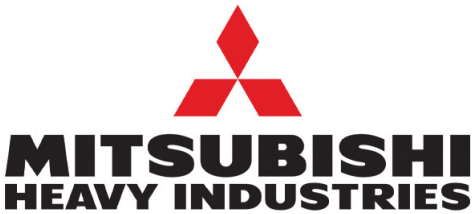


Specificații tehnice

R32

Capacitate nominală de răcire		kW	5.0
Capacitate nominală de încălzire		kW	6.0
Nivel putere sonoră	Răcire	dB(A)	59
	Încălzire	dB(A)	62
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	44 / 39 / 31 / 22
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	47 / 41 / 33 / 23
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m ³ /min	14.3 / 12.4 / 7.8 / 5.4
	Încălzire(Hi/Me/Lo/Ulo)	m ³ /min	17.3 / 14.3 / 9.8 / 6.2
Dimensiuni exterioare (HĂ×WĂ×D)		mm	305Ă×920Ă×220
Greutate netă		kg	13.0
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm Ă×Ă	6.35(1/4") / 12.7(1/2")
Filtre		Allergen Clear Filter Ă1, Photocatalytic lavabil Deodorizing FilterĂ1	





TEMPERATURE CONTROL FOR **TODAY & TOMORROW**

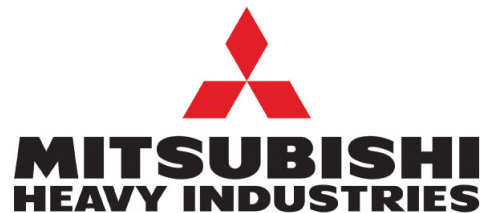

Schema tehnică

SRK20ZSX-WF, -WFB, -WFT, -W
SRK25ZSX-WF, -WFB, -WFT, -W
SRK35ZSX-WF, -WFB, -WFT, -W
SRK50ZSX-WF, -WFB, -WFT, -W
SRK60ZSX-WF, -WFB, -WFT, -W
SRK20ZSX-S SRK25ZSX-S SRK35ZSX-S
SRK50ZSX-S SRK60ZSX-S

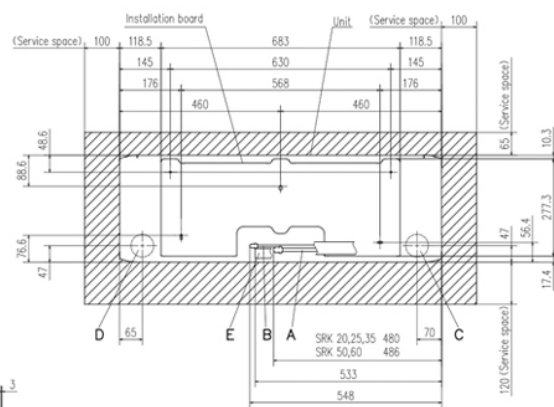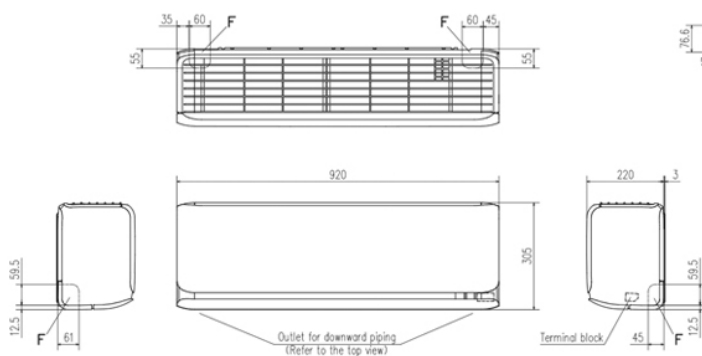

Space for installation and service when viewing from the front

Symbol	Content
A	Gas piping SRK 20,25,35 #9.52 (3/8") (Flare) SRK 50,60 #12.7 (1/2") (Flare)
B	Liquid piping #6.35 (1/4") (Flare)
C	Hole on wall for right rear piping (#65)
D	Hole on wall for left rear piping (#65)
E	Drain hose VP16
F	Outlet for piping