



TEMPERATURE CONTROL FOR TODAY & TOMORROW



SRK60ZSX-WF / SRC60ZSX-W1

6.1 KW



Unitate internă :



Unitate externă : SRC60ZSX-W1

Specificații tehnice

R32


Unitate internă			SRK60ZSX-WF		
Unitate externă			SRC60ZSX-W1		
Sursă de alimentare			Monofazic, 220 - 240, 50Hz		
Capacitate nominală de răcire (Min~Max)			kW	6.1 (1.0~6.9)	
Capacitate nominală de încălzire (Min~Max)			kW	6.8 (0.8~8.8)	
Consum de energie	Răcire/Încălzire		kW	1.71 / 1.65	
EER/COP	Răcire/Încălzire			3.57 / 4.12	
Amperaj maxim			A	15	
Nivel putere sonoră	U.I.	Răcire/Încălzire	dB(A)	62 / 63	
	U.E.	Răcire/Încălzire		65 / 64	
Nivel presiune sonoră	U.I.	Răcire (Hi/Me/Lo/Ulo)		48 / 41 / 33 / 22	
		Încălzire (Hi/Me/Lo/Ulo)		47 / 42 / 34 / 23	
	U.E.	Răcire/Încălzire		52 / 53	
Flux de aer	U.I.	Răcire (Hi/Me/Lo/Ulo)	m ³ /min	16.3 / 13.4 / 8.9 / 5.4	
		Încălzire (Hi/Me/Lo/Ulo)		17.8 / 13.7 / 10.9 / 6.2	
	U.E.	Răcire/Încălzire		41.5 / 39.0	
Dimensiuni exterioare	U.I.	Înălțime / Lățime / Adâncime	mm	305 x 920 x 220	
	U.E.			640 x 800(+71) x 290	
Greutate netă	U.I. / U.E.		kg	13.0 / 45.0	
Refrigerant		Tip/GWP		R32 / 675	
Refrigerant		Încărcare	kg/TCO2Eq	1.30 / 0.878	
Dimensiuni țeavă refrigerant		Lichid/Gaz	mm/ø	6.35(1/4") / 12.7(1/2")	
Lungime țeavă refrigerant (o direcție)			m	Max.30	
Diferență de nivel suportată		Unitate externă este mai sus/mai jos		m	Max.20 / Max.20
Interval de funcționare - temperatură exterioară	Răcire		°C	-15~46	
	Încălzire			-20~24	
Filtre			Filtru Antialergeni x1, Filtru lavabil fotocatalitic și dezodorizant x1		
Clasa Energetică (Răcire/Încălzire)			A++/A++		
SEER			7.80		
SCOP (Climat temperat)			4.70		
Pdesign (răcire/încălzire(@-10°C))			kW	6.10/5.20	
Consumul anual de electricitate (răcire/încălzire)			kWh/a	274/1551	
Performanța pe modul încălzire			Climat temperat		



**MITSUBISHI
HEAVY INDUSTRIES**




Schema tehnică

SRC20ZSX-W,-S SRC25ZSX-W,-S SRC35ZSX-W,-S
SRC40ZSX-W,-S SRC50ZSX-W,-S SRC60ZSX-W,-S SRC63ZR-W,-S


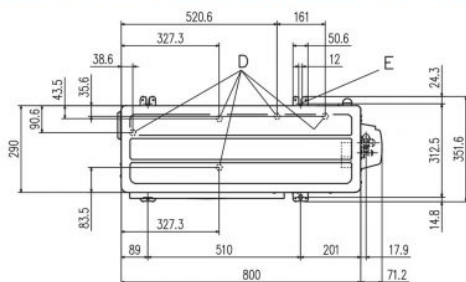


Symbol	Content
A	Service valve connection (gas side) 20.25.35 ϕ 9.32(3/8") (Flare) 40.50.60.63 ϕ 12.71(1/2") (Flare)
B	Service valve connection (liquid side) ϕ 6.35 (1/4") (Flare)
C	Pipe/cable draw-out hole
D	Drain discharge hole ϕ 20x5places
E	Anchor bolt hole ϕ 10x4places

Examples of installation Dimensions	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

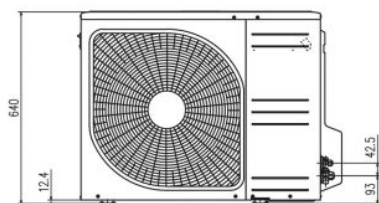

SRK20ZSX-WF, -WFB, -WFT, -W
SRK25ZSX-WF, -WFB, -WFT, -W
SRK35ZSX-WF, -WFB, -WFT, -W
SRK50ZSX-WF, -WFB, -WFT, -W
SRK60ZSX-WF, -WFB, -WFT, -W
SRK20ZSX-S SRK25ZSX-S SRK35ZSX-S
SRK50ZSX-S SRK60ZSX-S

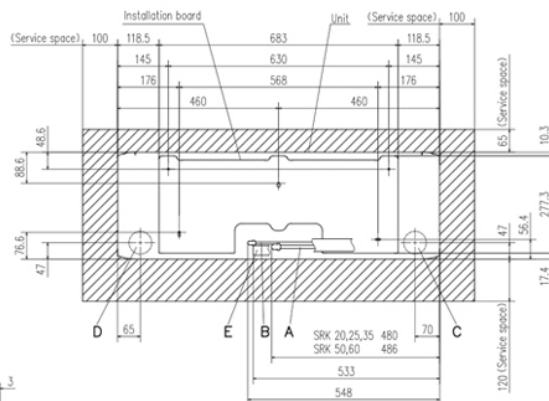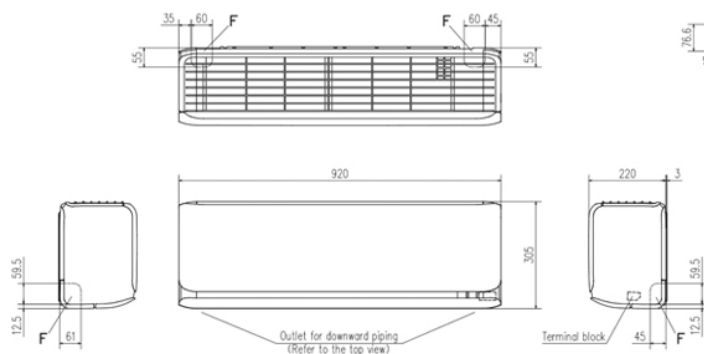

Space for installation and service when viewing from the front

Symbol	Content
A	Gas piping SRK 20,25,35 #9.52 (3/8") (Flare) SRK 50,60 #12.7 (1/2") (Flare)
B	Liquid piping #6.35 (1/4") (Flare)
C	Hole on wall for right rear piping (#65)
D	Hole on wall for left rear piping (#65)
E	Drain hose VP16
F	Outlet for piping