




TEMPERATURE CONTROL FOR TODAY & TOMORROW

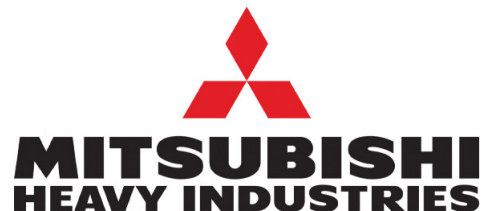

SRK71ZR-WF / SRC71ZR-W

7.1 KW



Unitate internă : SRK71ZR-WF



Unitate externă : SRC71ZR-W




Specificații tehnice

R32




Unitate internă			SRK71ZR-WF	
Unitate externă			SRC71ZR-W	
Sursă de alimentare			Monofazic, 220 - 240, 50Hz	
Capacitate nominală de răcire (Min~Max)		kW	7.1 (2.3~7.8)	
Capacitate nominală de încălzire (Min~Max)		kW	8.0 (2.0~10.8)	
Consum de energie	Răcire/Încălzire		kW	1.93 / 1.95
EER/COP	Răcire/Încălzire			3.68 / 4.10
Amperaj maxim		A	17	
Nivel putere sonoră	U.I.	Răcire/Încălzire	dB(A)	57 / 60
	U.E.	Răcire/Încălzire		63 / 63
Nivel presiune sonoră	U.I.	Răcire (Hi/Me/Lo/Ulo)	dB(A)	44 / 41 / 37 / 25
		Încălzire (Hi/Me/Lo/Ulo)		46 / 39 / 35 / 28
	U.E.	Răcire/Încălzire		53 / 51
Flux de aer	U.I.	Răcire (Hi/Me/Lo/Ulo)	m ³ /min	20.5 / 18.6 / 16.2 / 10.4
		Încălzire (Hi/Me/Lo/Ulo)		25.0 / 19.8 / 17.3 / 13.3
	U.E.	Răcire/Încălzire		55 / 43.5
Dimensiuni exterioare	U.I.	Înălțime / Lățime / Adâncime	mm	339 x 1197 x 262
	U.E.			750 x 880(+88) x 340
Greutate netă	U.I. / U.E.		kg	15.5 / 56.0
Refrigerant		Tip/GWP		R32 / 675
Refrigerant		Încărcare	kg/TCO2Eq	1.5 / 1.013
Dimensiuni țeavă refrigerant		Lichid/Gaz	mm/ø	6.35(1/4") / 15.88(5/8")
Lungime țeavă refrigerant (o direcție)			m	Max. 30
Diferență de nivel suportată		Unitate externă este mai sus/mai jos		m
Interval de funcționare		Răcire	°C	-15~46
- temperatură exterioară		Încălzire		-15~24
Filtre			Filtru Antialergeni x1, Filtru lavabil fotocatalitic și dezodorizant x1	
Clasa Energetică (Răcire/Încălzire)			A++/A+	
SEER			7.40	
SCOP (Climat temperat)			4.50	
Pdesign (răcire/încălzire(@-10°C))		kW	7.10/6.60	
Consumul anual de electricitate (răcire/încălzire)		kWh/a	337/2055	
Performanța pe modul încălzire			Climat temperat	



Example of installation	I	II	III
L1	Open	Open	500
L2	300	250	Open
L3	100	150	100
L4	250	250	250

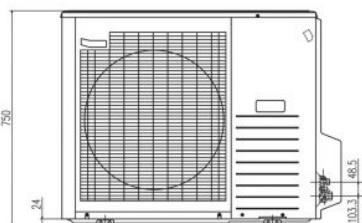

Technical drawing of a rectangular structure, likely a container or tank, showing dimensions and labels. The drawing includes a top view and a side view. The top view shows a rectangle with a width of 64 and a height of 43.5. The side view shows a rectangle with a width of 10 and a height of 43.5. The structure is labeled with 'G' at the top corners and '43.5' at the bottom corners. The drawing is a technical illustration of a rectangular structure, possibly a container or tank, with dimensions and labels.

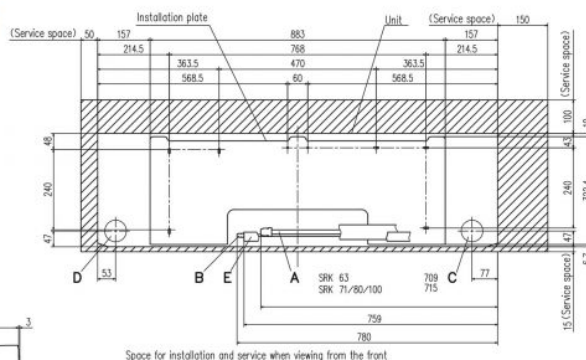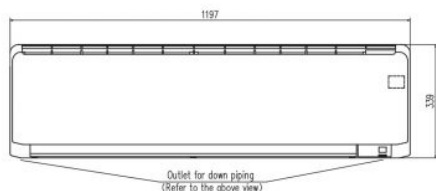

Symbol	Content
A	Gas piping SRK 63 SRK 71,80,100 #12.7 (1/2") (Flare) #15.88 (5/8") (Flare)
B	Liquid piping SRK 63,71,80 SRK 100 #6.35 (1/4") (Flare) #9.52 (3/8") (Flare)
C	Hide on wall for right rear piping (#65)
D	Hide on wall for left rear piping (#65)
E	Drain hose #PT6
F	Outlet for wiring (on both side)
G	Outlet for nitrogen (on both side)