




TEMPERATURE CONTROL FOR TODAY & TOMORROW



SRR50ZM-S
5.0 KW



Specificații tehnice

Capacitate nominală de răcire		kW	5.0
Capacitate nominală de încălzire		kW	5.8
Nivel putere sonoră	Răcire	dB(A)	59
	Încălzire	dB(A)	61
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	41 / 37 / 34 / 29
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	43 / 39 / 37 / 32
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m ³ /min	13.5 / 11.0 / 10.0 / 7.5
	Încălzire(Hi/Me/Lo/Ulo)	m ³ /min	14.5 / 12.5 / 11.0 / 8.5
Presiune statică externă disponibilă		Pa	50(Presiunea statică inițială cu filtru de aer: 5Pa)
Dimensiuni exterioare (HĂ×WĂ×D)		mm	200Ă×950Ă×500
Greutate netă		kg	24.0
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm â×	6.35(1/4") / 12.7(1/2")
Kit de admisie aer din partea inferioară (opțional)			UT-BAT2EF





The technical drawing illustrates the RSC-1000 remote control receiver in two views: a front view (top) and a side view (bottom).

Front View Dimensions:

- Inlet dimension:** 860
- Suspension bolts pitch:** 990
- Outlet dimension:** 860
- Vertical dimensions:** 21, 150, 19, 21, 457, 22, 58, 65, 165.
- Labels:** Air inlet, Control box, Connector (Accessory) (Installed on site), Remote control signal receiver (Cord length 1.8m).

Side View Dimensions:

- Outlet dimension:** 860
- Vertical dimensions:** 99, 35, 50, 65, 235-265, 37, 800 or less (Max. drain lift).
- Labels:** Air outlet.

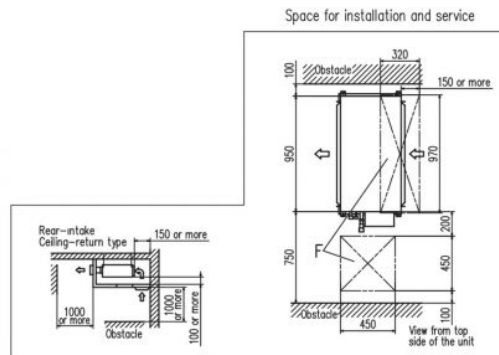

Symbol	Model	Content
A	Gas piping	41.7.2 (1/2") (Flare)
B	Liquid piping	46.35 (1/4") (Flare)
C1	Drain piping	MP25 (I.D.25, O.D.32) (Used with attached connector)
C2	Drain piping (Gravity drainage)	MP25 (I.D.25, O.D.32) (Used with attached connector)
D	Hole for wiring	475 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450x450), (330x169.70)