



TEMPERATURE CONTROL FOR **TODAY & TOMORROW**



FDC735KXZRE2

73.5 KW




Specificații tehnice

Combinatii posibile (FDC)				335KXZRE2 + 400KXZRE2
Capacitate nominala (cai putere)				26HP
Sursă de alimentare				Trifazic 380-415V, 50Hz
Putere de pornire			A	10
Curent maxim admis			A	51.2
Capacitate nominala	Racire		kW	73.5
	Incalzire			73.5
Consumul de energie		Racire	kW	21.21
		Incalzire		18.20
Dimensiuni exterioare	I/L/A		mm	2052x2700x720
Greutate netă			kg	677
Refrigerant	Tip / GWP			R410A
Incarcare refrigerant	R410A		kg	11.5x2
Dimensiuni țeavă refrigerant	Refrigerant lichid		mm(in)	ø15.88(5/8")
Dimensiuni țeavă refrigerant	Admisie refrigerant gazos		mm(in)	ø31.75(1 1/4")[ø34.92(1 3/8")]
Dimensiuni țeavă refrigerant	Refulare refrigerant gazos		mm(in)	ø25.4(1")[ø28.58(1 1/8")]
Capacitatea minima/maxima acceptata			%	50~160
Numarul maxim de unitati interne acceptate				78




TEMPERATURE CONTROL FOR TODAY & TOMORROW

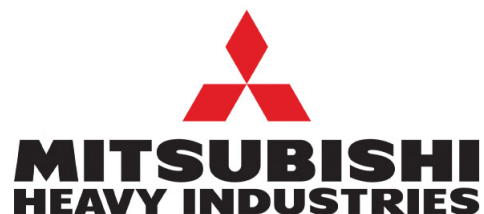

Schema tehnică

Dimensions

All measurements in mm.

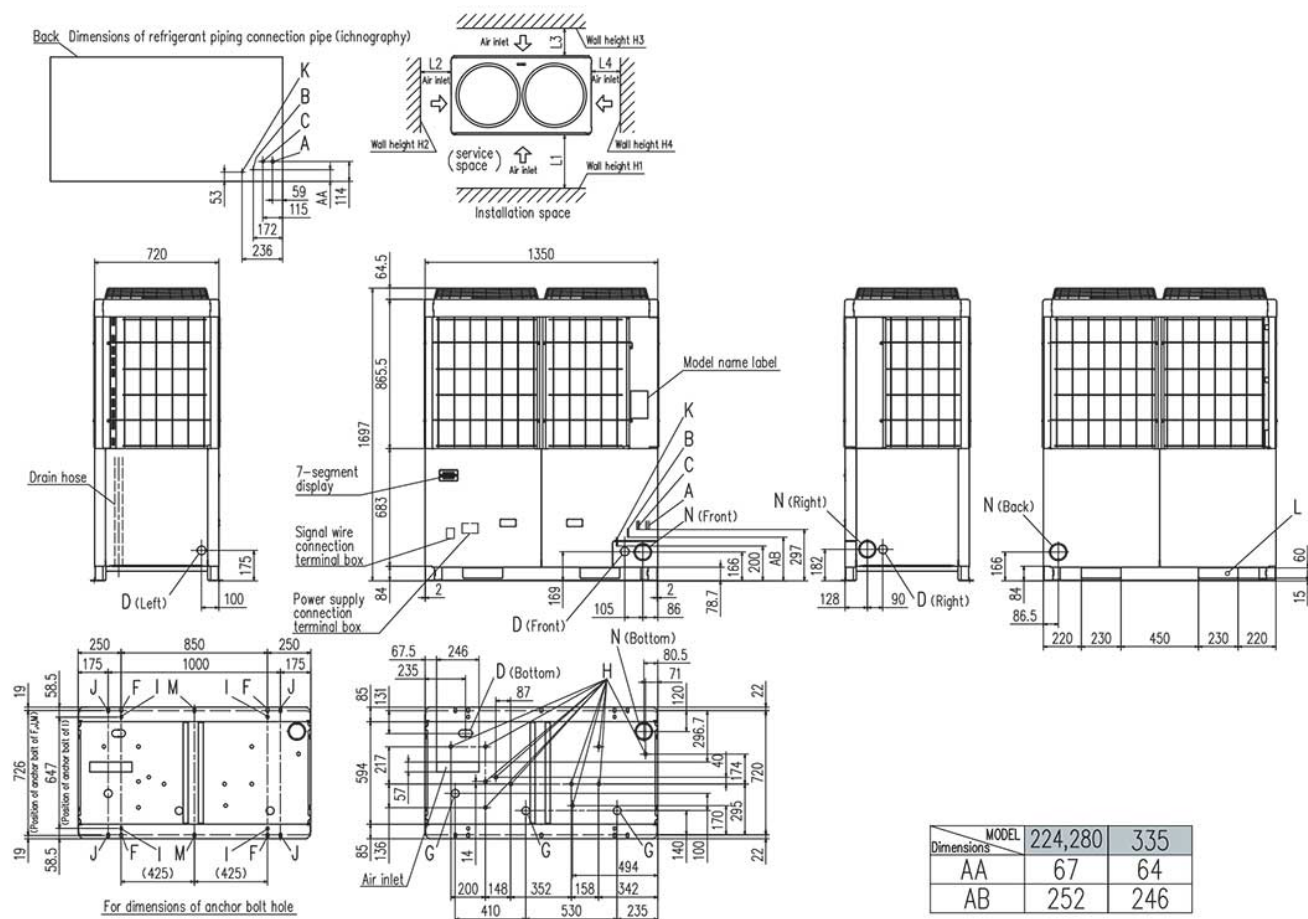

Dimensions

All measurements in mm.

